

60 TO 80 PSIG
CONSTANT LIGHTLY
LUBRICATED AIR
SUPPLY

FC- 373- RC6
LOW PRESSURE
AIR REGULATOR

1/4" O. D.
PLASTIC
TUBING

110 VAC 60 Hz
OR 24 VDC
SIGNAL

FC- 376- VE4
SINGLE SOLENOID
4WAY VALVE
WITH FLOW
CONTROLS

5/32" O. D.
PLASTIC
TUBING


5/32" O. D.
PLASTIC TUBING

1/8" O. D.
PLASTIC TUBING

CARCO FC- 1518
44 CONTACT MARKER

AVAILABLE IN 1/8", 1/4", AND 1/2" TIPS
1" / 1.5" / 2" STROKE LENGTHS

CARCO MINI SPRING MARKER

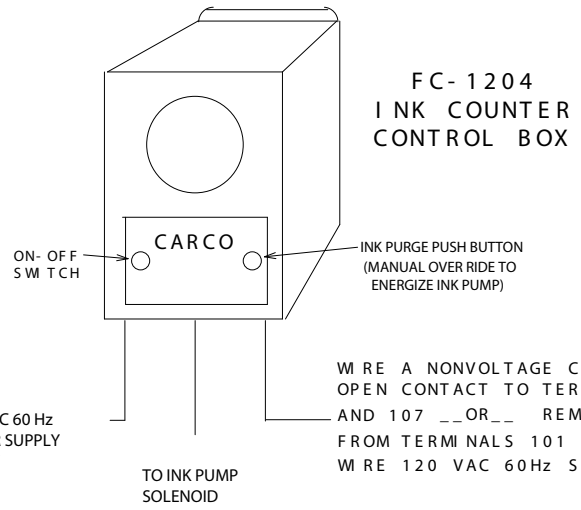

FC- 1204
INK COUNTER
CONTROL BOX

120 VAC 60 Hz
POWER SUPPLY
OR 24V

TO INK PUMP
SOLENOID

WIRE A NONVOLTAGE CARRYING
OPEN CONTACT TO TERMINALS 102
AND 107 OR REMOVE JUMPER
FROM TERMINALS 101 AND 108 AND
WIRE 120 VAC 60Hz SIGNAL TO

OPTIONAL

FC-1157-C-VE-R27-JT
INK PUMP SYSTEM

FC- 374- R27
2 . OZ RESERVOIR

1/4" NPT TO 1/8" NPT
REDUCING NIPPLE

60 TO 80 PSIG
CONSTANT LIGHTLY
LUBRICATED AIR
SUPPLY

MOUNTING HOLES FOR 1/4"
SCREWS 2.00" BETWEEN
CENTERS

FORBES

4855 Kendrick SE
Grand Rapids, MI 49512
616-940-9900

SYSTEM SHEET

DATE

6-22-05

FC-1518-A